



Groomer installation on BM:

It's important to note that the groomer is reserved for the sports field only, the ground must also be neat and clean.

The Groomer should not be used on rough terrain, crossing paths or covered with leaves and branches during part of the year.

Groomer installation:

1. Place the Groomer on the chassis.
The Groomer is placed on the side rails in the inserts originally intended for the brushes. *Loctite Bleu*

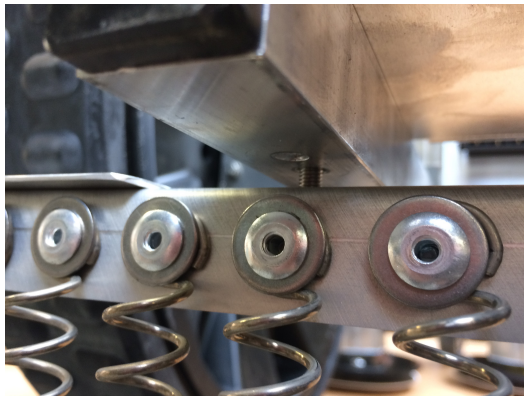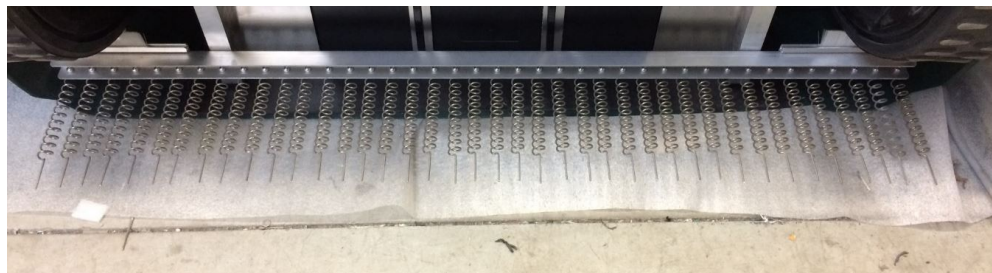

2. Cut the springs at a safe distance when the robot is on the ground. (Approx. 15 mm above ground) *Cutting pliers*
The goal of the springs is to straighten (not tear) the grass, hence the importance of cutting the springs well so as not to damage the ground. (Repeat for 40 springs)

The theoretical rule is:

- If I cut to 30mm, the springs its cut 15mm from the ground.

OK



NOK

